The new degree of comfort.™

Rheem Prestige[™] Series Hybrid Heat Pump is our most advanced, energy-efficient electric water heater – its 2.45 Energy Factor lowers energy costs

Efficiency

 High 2.45 EF reduces operating cost \$329 annually compared to a standard 50-gallon electric model

Performance

- 8700 Btu/h compressor: the most powerful in its class more heat can be created by the heat pump and less by the costly electric elements. This translates into significant fuel saving in real life applications. For still more savings, the Rheem hybrid has a wider temperature operating range, which means the heat pump can be used to heat water more days throughout the year.
- Ambient operating range: 37-120° F is widest in class, offering more days of HP operation annually; designed to meet Northern Climate Spec (Tier 1)

Operation Modes

- Energy Saver
- Heat Pump Only
- High Demand
- Electric Heat Only
- Vacation: 2-28 days (or placed on hold indefinitely)

120

Full-Color LCD Display

 Intuitive, back lit touch screen with diagnostics

Easy Installation

- Easy access side connections
- Narrow 21" diameter, fits through access doors
- Easily replaces a standard electric water heater

Plus...


- EcoNet[™] compatible for future integration with home automation, energy management and demand response systems
- Patented magnesium anode rod with resistor extends the life of the tank
- 3/4" NPT water inlet, outlet and condensate drain connections
- Incoloy stainless steel resistor elements; dry-fire protection
- Easy access, top mounted washable air filter
- 2-1/2" Non-CFC foam insulation
- Brass drain valve
- Temperature and pressure relief valve

Warranty


 10-Year limited tank and parts warranty*

*See Residential Warranty Certificate for complete information

Units meet or exceed ANSI requirements and have been tested according to D.O.E. procedures. Units meet or exceed the energy efficiency requirements of NAECA, ASHRAE standard 90, ICC Code and all state energy efficiency performance criteria.



8" Top clearance for air circulation 3/4" water connections 208-230 Volt – 1 PH Max amp draw – 24 amps





Rheem Prestige Series Hybrid Heat Pump Water Heater

50-Gallon Capacity 208-230 Volt / 1 PH / 24 Amps Electric









LEED Points = 3


DESCRIPTION				DIMENSIONS (SHOWN IN INCHES)					ENERGY INFORMATION	
GAL. CAP.	MODEL NUMBER	COMPRESSOR BTU/H	FIRST HOUR RATING GPH	RECOVERY IN GPH @90° F RISE	HEIGHT A	DIAMETER B	UNIT WT. (LBS)	APPROX. SHIP WT. (LBS)	ENERGY SAVER	AVG. ANN. OPER. COST
50	HB50RH	8700	57	21	75-1/2	21	180	226	2.45 EF	\$191

Energy Factor and Average Annual Operating Costs based on D.O.E. (Department of Energy) test procedures. D.O.E. national average fuel rate electricity 10.65¢/KWH.





Full-Color LCD Display Screens

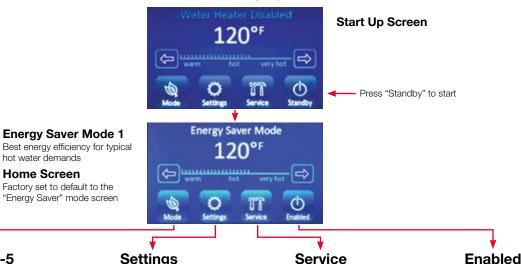

Modes 2-5



HP Only Mode: Provides highest energy efficiency when hot water demands are low

Home Screen



High Demand Mode: Right selection for very high demand (simultaneous operation of multiple hot water fixtures)



Electric Heat Mode: Operates like a standard electric water heater; no heat pump



Vacation Mode: Can be set from 2 to 28 days (82°) or placed on "hold" indefinitely

Settings



- Select scale: Fahrenheit or Celsius
- Lock or unlock the home screen; Setting screen remains unlocked
- Enable/disable beeping alarm

Service



Current status of HB50 hybrid water heater



Displays model & serial nos., SW version; change network instance or




Displays current alarms and past alarms; ability to clear all alarms

Press to toggle between Enabled & Standby

- Enabled: heats water
- Standby: doesn't heat water Note: "Modes" can't be selected when unit is in "Standby"



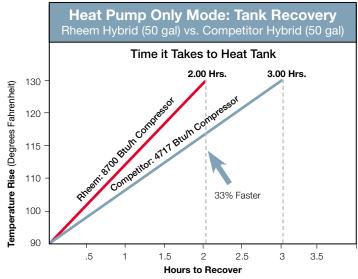

In keeping with its policy of continuous progress and product improvement, Rheem reserves the right to make changes without notice.

Rheem Water Heating • 101 Bell Road Montgomery, Alabama 36117-4305 • 1.800.621.5622 Rheem Canada Ltd./Ltée • 125 Edgeware Road, Unit 1 Brampton, Ontario L6Y 0P5 • 1.800.268.6966

